

511, 473

Rec'd PCT/PTO 15 OCT 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
13 November 2003 (13.11.2003)

PCT

(10) International Publication Number  
WO 03/093079 A1(51) International Patent Classification<sup>7</sup>: B60S 1/38

(21) International Application Number: PCT/EP03/04702

(22) International Filing Date: 29 April 2003 (29.04.2003)

(25) Filing Language: English

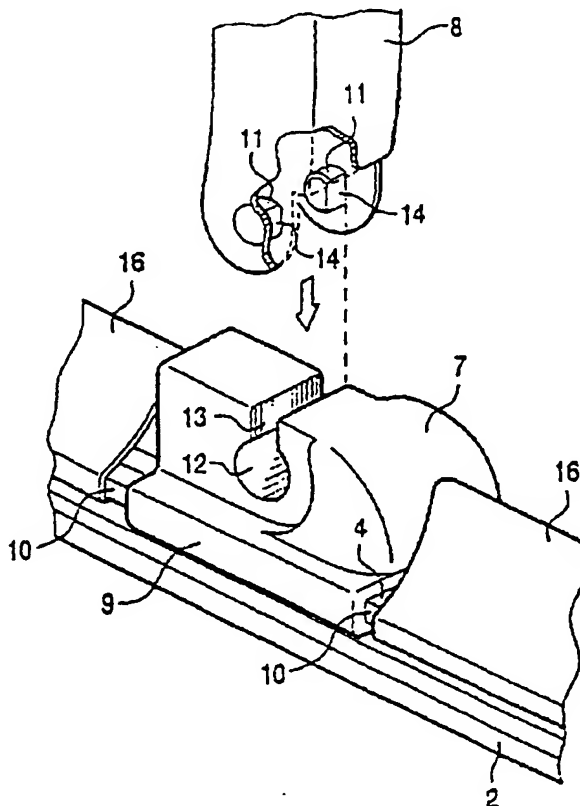
(26) Publication Language: English

(30) Priority Data:  
02076754.7 3 May 2002 (03.05.2002) EP(71) Applicant (for all designated States except US): **FEDERAL-MOGUL S.A.** [BE/BE]; Avenue Champion, B-6790 AUBANGE (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARMOY, Didier** [BE/BE]; Voie de Villers, B-08370 MARGNY (BE).**HENIN, Pierre** [BE/BE]; Rue de Villemont, 339, B-6730 BELLEFONTAINE (BE). **BOLAND, Xavier** [BE/BE]; Route de Luxembourg, 304, B-6700 ARLON (BE).(74) Agent: **HOOVELD, Arjen, Jan, Winfried**; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: WINDSCREEN WIPER DEVICE

(57) **Abstract:** A windscreen wiper device (1) comprising an elastic, elongated carrier element, as well as an elongated wiper blade (2) of a flexible material, which can be placed in abutment with a windscreen to be wiped, which wiper blade (2) includes opposing longitudinal grooves (3) on its longitudinal sides, in which grooves (3) spaced-apart longitudinal strips (4) of the carrier element are disposed, wherein neighbouring ends of said longitudinal strips (4) are interconnected by a respective connecting piece (6), which windscreen wiper device (1) comprises a connecting device (7) for an oscillating wiper arm (8), wherein said oscillating arm (8) is pivotally connected to said connecting device (7) about a pivot axis near one end, a special feature of which is that said connecting device (7) comprises engaging members (9) being welded to longitudinal sides (10) of said longitudinal strips (4) that face away from each other in such a manner as to withstand shearing forces in a direction along said longitudinal strips (4).

WO 03/093079 A1